
GAM RUN 17-021: PINEYWOODS GROUNDWATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Shirley C. Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
512-936-0883
December 21, 2017



Shirley C. Wade
12/21/17

This page is intentionally blank.

GAM RUN 17-021: PINEYWOODS GROUNDWATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Shirley C. Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
512-936-0883
December 21, 2017

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2015), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Pineywoods Groundwater Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information and this information includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Pineywoods Groundwater Conservation District should be adopted by the district on or before September 4, 2018, and submitted to the Executive Administrator of the TWDB on or before October 4, 2018. The current

management plan for the Pineywoods Groundwater Conservation District expires on December 3, 2018.

We used three groundwater availability models to estimate the management plan information for the aquifers within the Pineywoods Groundwater Conservation District. Information for the Carrizo-Wilcox, Queen City, and Sparta aquifers is from version 2.01 of the groundwater availability model for the northern part of the Carrizo-Wilcox, Queen City, and Sparta aquifers (Kelley and others, 2004). Information for the Yegua-Jackson Aquifer is from version 1.01 of the groundwater availability model for the Yegua-Jackson Aquifer (Deeds and others, 2010). Information for the Gulf Coast Aquifer System is from version 3.01 of the groundwater availability model for the northern portion of the Gulf Coast Aquifer System (Kasmarek, 2013).

This report replaces the results of GAM Run 13-003 (Anaya, 2013). GAM Run 17-021 includes results from the recently released groundwater availability model for the northern portion of the Gulf Coast Aquifer System (Kasmarek, 2013) and meets current standards set after GAM Run 13-003 was released. Tables 1 through 5 summarize the groundwater availability model data required by statute and Figures 1 through 5 show the area of the models from which the values in the tables were extracted. If, after review of the figures, the Pineywoods Groundwater Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the three groundwater availability models mentioned above were used to estimate information for the Pineywoods Groundwater Conservation District management plan. Water budgets were extracted for the historical model periods for the Carrizo-Wilcox, Queen City, and Sparta aquifers (1980 through 1999), Yegua-Jackson Aquifer (1980 through 1997) and Gulf Coast Aquifer System (1980 through 2009) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). The average annual water budget values for recharge, surface-water outflow, inflow to the district, and outflow from the district for the aquifers within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Carrizo-Wilcox, Queen City, and Sparta aquifers

- We used version 2.01 of the groundwater availability model for the northern part of the Carrizo-Wilcox, Queen City, and Sparta aquifers. See Fryar and others (2003) and Kelley and others (2004) for assumptions and limitations of the groundwater availability model for the northern part of the Carrizo-Wilcox, Queen City, and Sparta aquifers.
- This groundwater availability model includes eight layers, which generally represent the Sparta Aquifer (Layer 1), the Weches Formation confining unit (Layer 2), the Queen City Aquifer (Layer 3), the Reklaw Formation confining unit (Layer 4), the Carrizo Formation (Layer 5), the Upper Wilcox (Layer 6), the Middle Wilcox (Layer 7), and the Lower Wilcox (Layer 8).
- Individual water budgets for the district were determined for the Sparta Aquifer (Layer 1), the Queen City Aquifer (Layer 3), and the Carrizo-Wilcox Aquifer (Layers 5 through 8, collectively).
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

Yegua-Jackson Aquifer

- We used version 1.01 of the groundwater availability model for the Yegua-Jackson Aquifer. See Deeds and others (2010) for assumptions and limitations of the groundwater availability model.
- This groundwater availability model includes five layers which represent the outcrop of the Yegua-Jackson Aquifer and younger overlying units—the Catahoula Formation (Layer 1), the upper portion of the Jackson Group (Layer 2), the lower portion of the Jackson Group (Layer 3), the upper portion of the Yegua Group (Layer 4), and the lower portion of the Yegua Group (Layer 5).
- An overall water budget for the district was determined for the Yegua-Jackson Aquifer (Layer 1 through Layer 5, collectively, for the portions of the model that represent the Yegua-Jackson Aquifer).
- The model was run with MODFLOW-2000 (Harbaugh and others, 2000).

Gulf Coast Aquifer System

- We used version 3.01 of the groundwater availability model for the northern portion of the Gulf Coast Aquifer System for this analysis. See Kasmarek (2013) for assumptions and limitations of the model.
- The model has four layers which represent the Chicot Aquifer (Layer 1), the Evangeline Aquifer (Layer 2), the Burkeville Confining Unit (Layer 3), and the Jasper Aquifer and parts of the Catahoula Formation in direct hydrologic communication with the Jasper Aquifer (Layer 4).
- Water budgets for the district were determined for the Gulf Coast Aquifer System (Layers 1 through 4 collectively).
- The model was run with MODFLOW-2000 (Harbaugh and others, 2000).
- Because this model assumes a no-flow boundary condition at the base we used version 1.01 of the groundwater availability model for the Yegua-Jackson Aquifer to investigate groundwater flows between the Catahoula Formation and the base of the Gulf Coast Aquifer System. See Deeds and others (2010) for assumptions and limitations of the groundwater availability model for the Yegua-Jackson Aquifer.

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifers according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability model results for the Carrizo-Wilcox, Queen City, Sparta, and Yegua-Jackson aquifers and the Gulf Coast Aquifer System, located within Pineywoods Groundwater Conservation District and averaged over the historical calibration periods, as shown in Tables 1 through 5.

1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface-water outflow—the total water discharging from the aquifer (outflow) to surface-water features such as streams, reservoirs, and springs.
3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.

4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

The information needed for the district's management plan is summarized in Tables 1 through 5. It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.

TABLE 1. SUMMARIZED INFORMATION FOR THE CARRIZO-WILCOX AQUIFER FOR PINEYWOODS GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Carrizo-Wilcox Aquifer	21,337
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Carrizo-Wilcox Aquifer	6,799
Estimated annual volume of flow into the district within each aquifer in the district	Carrizo-Wilcox Aquifer	24,100
Estimated annual volume of flow out of the district within each aquifer in the district	Carrizo-Wilcox Aquifer	4,902
Estimated net annual volume of flow between each aquifer in the district	Flow to Carrizo-Wilcox Aquifer from the overlying Reklaw Confining Unit	15,938
	Flow to Carrizo-Wilcox Aquifer from brackish Carrizo-Wilcox units	7,920


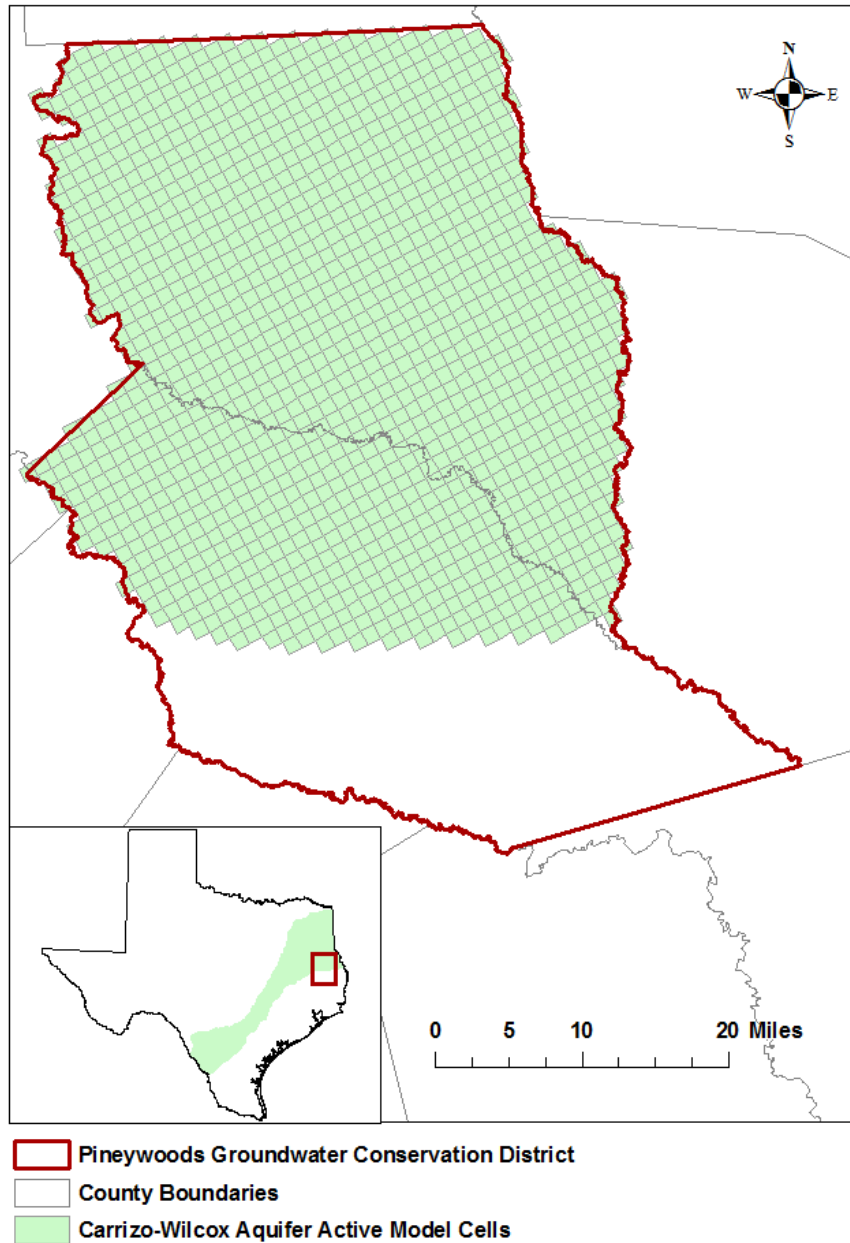


FIGURE 1. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CARRIZO-WILCOX AQUIFER FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 2. SUMMARIZED INFORMATION FOR THE QUEEN CITY AQUIFER FOR PINEYWOODS GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Queen City Aquifer	7,244
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Queen City Aquifer	796
Estimated annual volume of flow into the district within each aquifer in the district	Queen City Aquifer	446
Estimated annual volume of flow out of the district within each aquifer in the district	Queen City Aquifer	239
Estimated net annual volume of flow between each aquifer in the district	Flow from Queen City Aquifer into the underlying Reklaw Confining Unit	6,719
	Flow into Queen City Aquifer from the overlying Weches Confining Unit	4,709
	Flow from Queen City Aquifer into brackish Queen City units	26

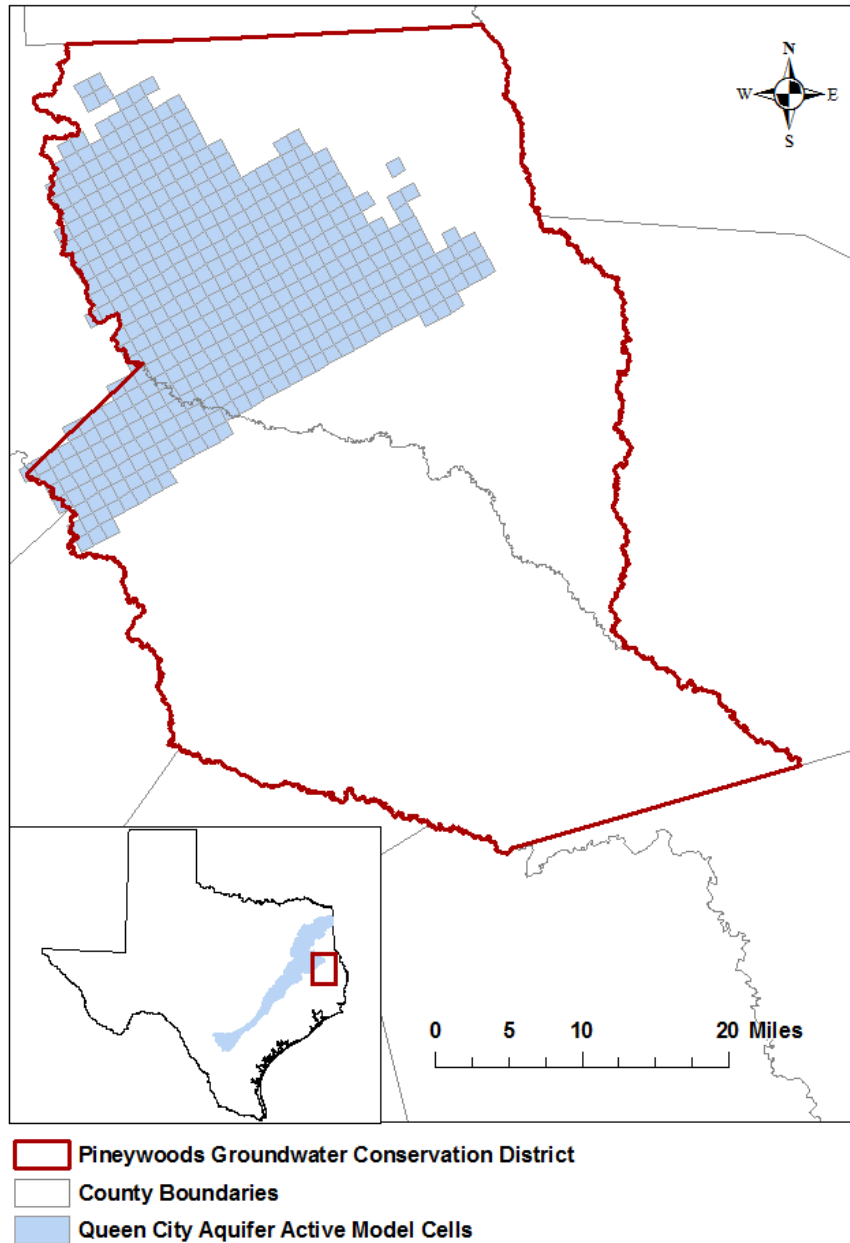


gcd boundary date = 11.28.16, county boundary date = 02.02.11, qcsp_n model grid date = 12.30.15

FIGURE 2. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE QUEEN CITY AQUIFER FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 3. SUMMARIZED INFORMATION FOR THE SPARTA AQUIFER FOR PINEYWOODS GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Sparta Aquifer	16,013
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Sparta Aquifer	7,473
Estimated annual volume of flow into the district within each aquifer in the district	Sparta Aquifer	987
Estimated annual volume of flow out of the district within each aquifer in the district	Sparta Aquifer	392
Estimated net annual volume of flow between each aquifer in the district	Flow into Sparta Aquifer from the overlying units	359
	Flow from Sparta Aquifer into the underlying Weches Confining Unit	7,170
	Flow from Sparta Aquifer to brackish Sparta units	205

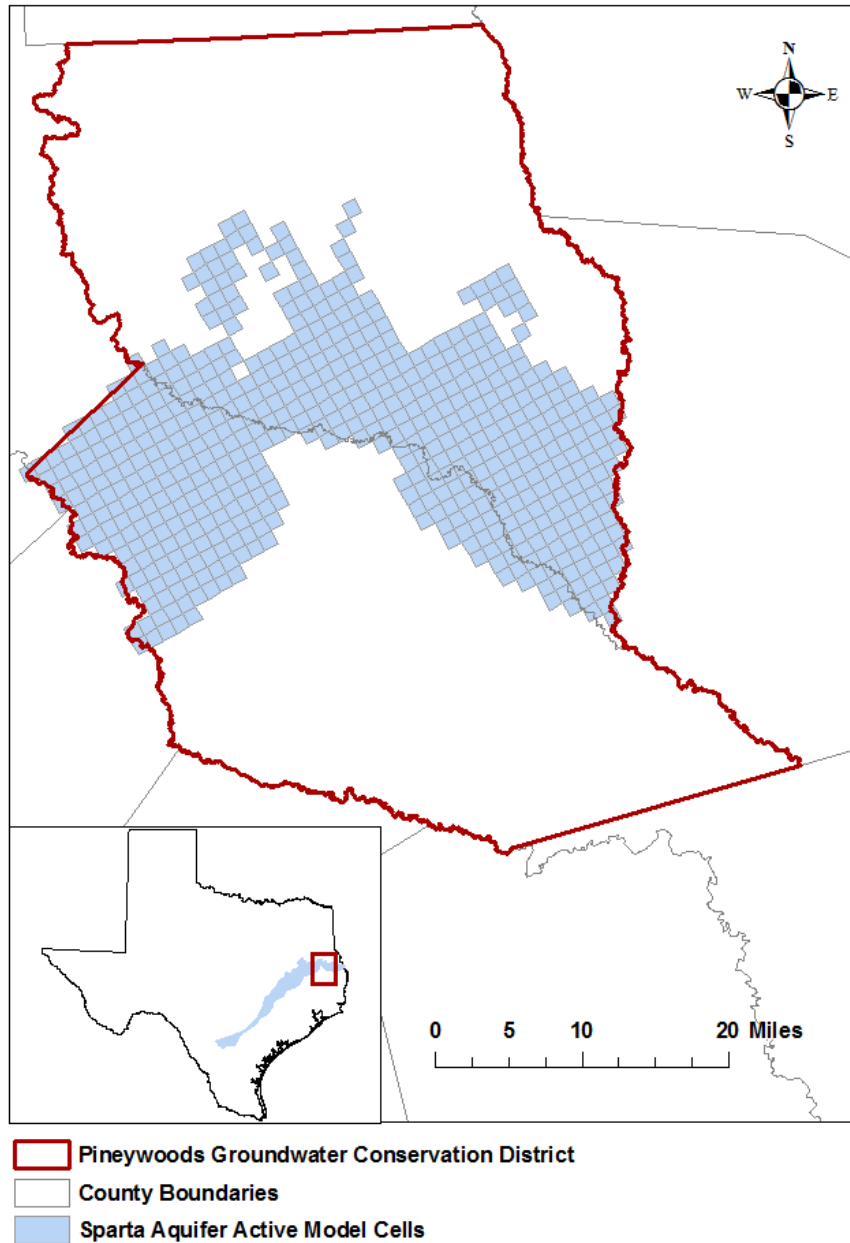





gcd boundary date = 11.28.16, county boundary date = 02.02.11, qcsp_n model grid date = 12.30.15

FIGURE 3. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE SPARTA AQUIFER FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 4. SUMMARIZED INFORMATION FOR THE YEGUA-JACKSON AQUIFER FOR PINEYWOODS GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

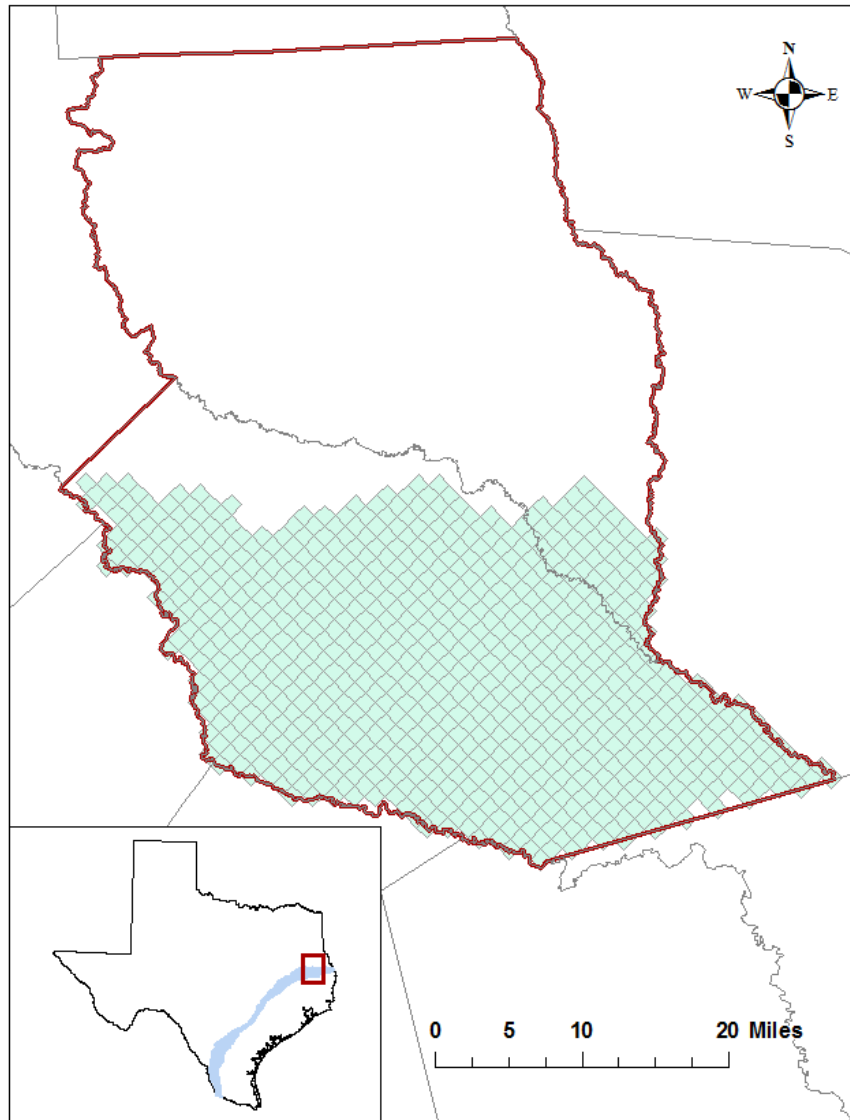Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Yegua-Jackson Aquifer	52,550
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Yegua-Jackson Aquifer	37,559
Estimated annual volume of flow into the district within each aquifer in the district	Yegua-Jackson Aquifer	11,506
Estimated annual volume of flow out of the district within each aquifer in the district	Yegua-Jackson Aquifer	9,786
Estimated net annual volume of flow between each aquifer in the district	Flow to Yegua-Jackson Aquifer from the Catahoula and younger units	11



-  County Boundaries
-  Pineywoods Groundwater Conservation District
-  Yegua-Jackson Aquifer Active Model Cells

gcd boundary date = 11.28.16, county boundary date = 02.02.11, ygjk model grid date = 11.13.17


FIGURE 4. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE YEGUA-JACKSON AQUIFER FROM WHICH THE INFORMATION IN TABLE 4 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 5. SUMMARIZED INFORMATION FOR THE GULF COAST AQUIFER SYSTEM FOR PINEYWOODS GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Gulf Coast Aquifer System	18
Estimated annual volume of water that discharges from the aquifer to springs and any surface-water body including lakes, streams, and rivers	Gulf Coast Aquifer System	0
Estimated annual volume of flow into the district within each aquifer in the district	Gulf Coast Aquifer System	0
Estimated annual volume of flow out of the district within each aquifer in the district	Gulf Coast Aquifer System	18
Estimated net annual volume of flow between each aquifer in the district ¹	Gulf Coast Aquifer System	NA ²

¹ An evaluation of the general head boundary flux from the groundwater availability model for the Yegua-Jackson Aquifer suggests a flux of 72 acre-feet per year from the Jasper Aquifer to the Catahoula Formation. A part of the flow to the Catahoula confining system from the Jasper Aquifer represents flow from the Gulf Coast Aquifer System to deeper units and part represents flow within the Gulf Coast Aquifer System. It should be noted that the groundwater availability model for the Yegua-Jackson Aquifer and the groundwater availability model for the Gulf Coast Aquifer System have different assumptions.

² NA: Not applicable. The groundwater availability model for the Gulf Coast Aquifer System assumes a no-flow boundary condition at the base.

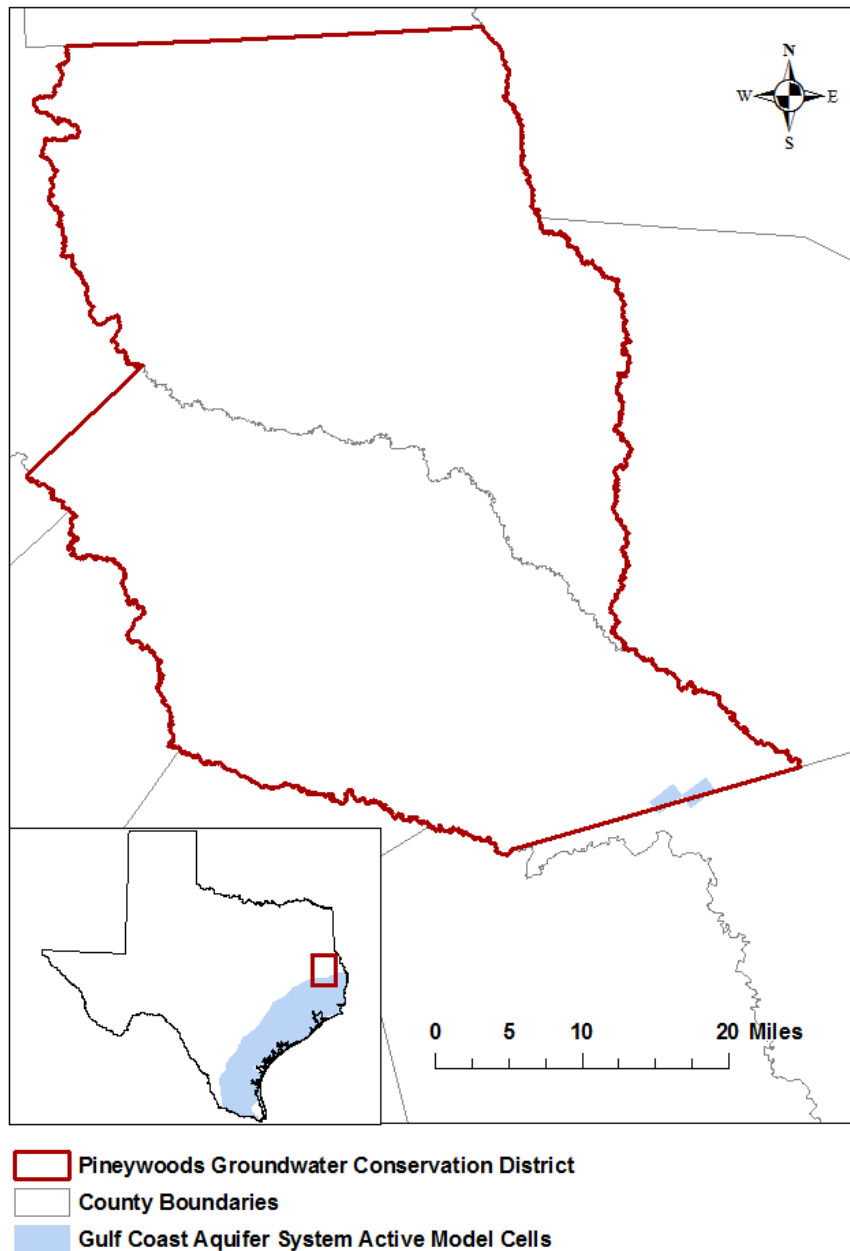

gcd boundary date = 11.28.16, county boundary date = 02.02.11, glfc_n model grid date = 12.30.15

FIGURE 5. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE GULF COAST AQUIFER SYSTEM FROM WHICH THE INFORMATION IN TABLE 5 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

LIMITATIONS:

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historic pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional-scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Anaya, R., 2013, GAM Run 13-003: Pineywoods Groundwater Conservation District Management Plan, 19 p.,
<http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR13-003.pdf>
- Deeds, N. E., Yan, T., Singh, A., Jones, T. L., Kelley, V. A., Knox, P. R., and Young, S. C., 2010, Groundwater availability model for the Yegua-Jackson Aquifer: Final report prepared for the Texas Water Development Board by INTERA, Inc., 582 p.,
http://www.twdb.texas.gov/groundwater/models/gam/ygjk/YGJK_Model_Report.pdf
- Fryar, D., Senger, R., Deeds, N., Pickens, J., Jones, T., Whallon, A.J., Dean, K.E., 2003, Groundwater availability model for the northern Carrizo-Wilcox aquifer: Contract report to the Texas Water Development Board, 529 p.,
http://www.twdb.texas.gov/groundwater/models/gam/czwx_n/CZWX_N_Full_Report.pdf
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models: U.S. Geological Survey Groundwater Software.
- Harbaugh, A. W., Banta, E. R., Hill, M. C., and McDonald, M. G., 2000, MODFLOW-2000, the U.S. Geological Survey modular ground-water model -- User guide to modularization concepts and the Ground-Water Flow Process: U.S. Geological Survey Open-File Report 00-92, 121 p.
- Harbaugh, A. W., and McDonald, M. G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey modular finite-difference ground-water flow model: U.S. Geological Survey Open-File Report 96-485, 56 p.
- Kasmarek, M.C., 2013, Hydrogeology and simulation of groundwater flow and land-surface subsidence in the northern part of the Gulf Coast Aquifer System, Texas, 1891-2009: United States Geological Survey Scientific investigations Report 2012-5154, 55 p.
http://www.twdb.texas.gov/groundwater/models/gam/glfc_n/HAGM.SIR.Version1.1.November2013.pdf
- Kelley, V. A., Deeds, N. E., Fryar, D. G., and Nicot, J. P., 2004, Groundwater availability models for the Queen City and Sparta aquifers: Contract report to the Texas Water Development Board, 867 p.,
http://www.twdb.texas.gov/groundwater/models/gam/qcsp/QCSP_Model_Report.pdf?d=1737.9650000000001.

National Research Council, 2007, Models in Environmental Regulatory Decision Making
Committee on Models in the Regulatory Decision Process, National Academies Press,
Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.